

FLEX-MAT®

HIGH VIBRATION WIRE SCREEN

APPLICATION CASE STUDY

FELDSPAR > South East Asia

SITUATION:

A new plant running at low capacity with very frequent cleaning shutdowns


PROBLEM:

The high moisture of 7-15% made required shutdowns every two hours.

SOLUTION:

Switched to **FLEX-MAT Modular Type D** on top and bottom.

- Eliminated blinding and unplanned downtime.
- Increased production capacity.

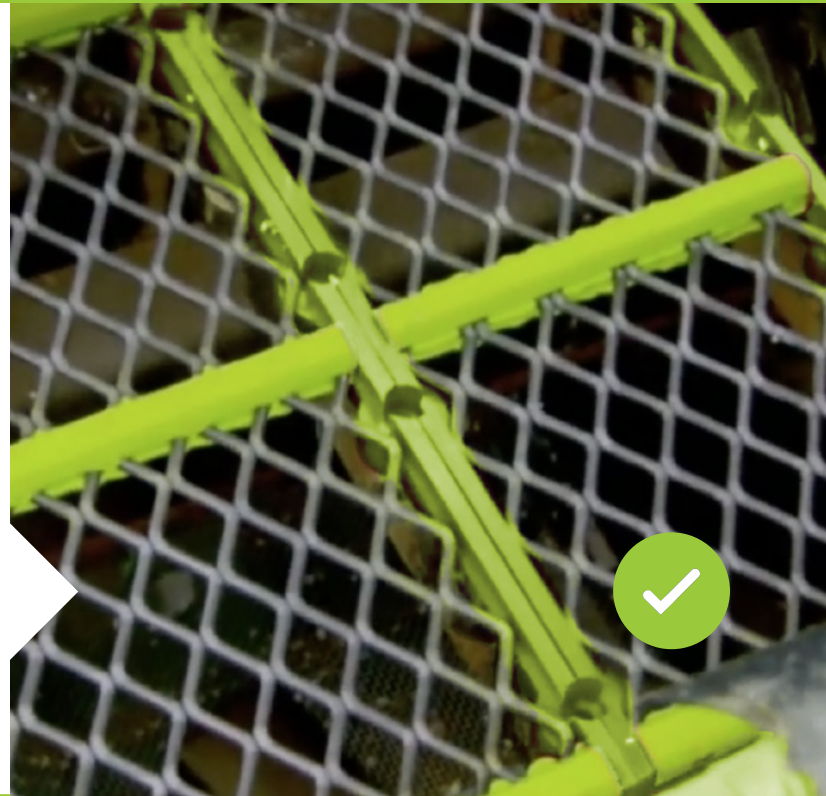

BENEFITS:

- > Production increased by 35 tph.
- > Availability increased by 30%.

THROUGH INCREASED CAPACITY AND AVAILABILITY, FLEX-MAT INCREASED THE PRODUCTION VALUE BY \$42,400us PER DAY.